

STARTRITE

Band-it 12S1

12" Bandsaw with
7 1/2" under guides



**Light duty
low cost
woodcutting
bandsaw
with
big machine
features &
performance**

Constructional details

The box type construction applied to the all steel body ensures new standards of stability, accuracy and vibration-free running. Well finished and of pleasing appearance, the saw frame provides exceptionally robust and rigid mounting conditions for the following operative units:

Table

A precision machined 16" x 16" iron casting with mitre gauge slot and fixing holes for rip fence rail.

Wheels

12" diameter disc type, rubber bonded and rapidly interchangeable for tyre service. Mounted on cast iron hubs with dual 'sealed for life' ball bearings.

Guides

New type solid insert design instantly interchangeable for different blade widths. Guide inserts 1/4", 3/8" and 1/2" supplied as standard equipment.

Top wheel slide

Includes an adjustable saw straining and tracking device. A tension indicator graduated in blade widths ensures accurate and easy setting.

Guards

Single piece hinged door to saw frame and shield fitted to guide post provide complete protection.

Transmission

A highly efficient direct drive is provided from a 550 W flange mounted motor controlled by overload release push button starter.

Specification

Height under guides	...	7 1/4" (185 mm)
Depth of throat	...	11 3/8" (290 mm)
Table Size	...	16" x 16" (406 x 406 mm)
Max. blade length and width	...	88" x 1/2" (2235 x 12 mm)
Max. blade thickness016 (27 S.W.G.) (-40 mm)
Band Wheels	...	12" Dia. (304 mm)
Motor	...	0.73 hp (550 W) 1425 r.p.m.
Table height: bench and floor types	...	16" x 40" (406 x 1016 mm)
Overall Dimensions	...	28" x 19 1/2" x 41" (710 x 495 x 1041 mm)
Net weight	...	205 lbs (93 kg)
Standard Equipment	...	1/2" Blade, Motor, Starter and mitre gauge. Thermal Overload, No-Volt Release Push-Button Starter

Optional equipment

Rip fence, Cabinet Base, Lighting Set, Supaflex Blades, Brazer or Welder, 12" dia. Disc Bandwheels.


STARTRITE, BRITAIN'S LARGEST SUPPLIERS OF BANDSAWING MACHINES.



Machine mounted on cabinet base.



Contour sawing 4" thick timber.

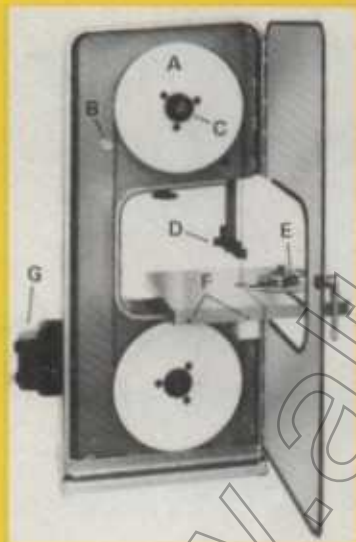

Hinged door provides easy access for cleaning and change of saw bands.

- (a) Rubber bonded interchangeable band wheels.
- (b) Tension indicator and adjusting knob.
- (c) Blade tracking control knob.
- (d) Block insert guides on sliding tool post.
- (e) Graduated mitre gauge.
- (f) Fixing holes for rip fence (optional extra).
- (g) Overload release, push button starter.