

# STARTRITE

## COMBINED PLANER & THICKNESSER MODEL PT 260



### Features include:

- \* Full guarding to meet the requirements of the woodworking machinery regulations
- \* Large surface and thickness capacity.
- \* Rebating up to 15mm deep.
- \* Lever table adjustment for rapid setting of depth of cut.
- \* Ground steel table surfaces.
- \* Large column support for thicknessing table with handwheel & scale for ease of adjustment.
- \* Anti-kick back pawls.

## Constructional details

The Startrite PT260 is robustly built and attractively finished in durable stove enamelled paint. Work tables are heavy steel, suitably ribbed for strength and rigidity, with ground surfaces for accuracy.

A two knife steel planer block runs in sealed-for-life ball bearings for trouble free performance and deflector plates protect the infeed and outfeed rollers from the shavings.

All electrical and working parts are contained within the steel base unit which incorporates provision for bolting the machine down if required. Internal wiring is connected ready for use. Only mains supply to switch panel is required to put this quality machine into use.

## Specification

|                         | Imperial<br>(Approx.) | Metric<br>(Accurate) |
|-------------------------|-----------------------|----------------------|
| Surface Capacity        | 10 1/2"               | 260mm                |
| Combined table length   | 39 3/8"               | 1000mm               |
| Infeed table width      | 13 1/2"               | 345mm                |
| Outfeed table width     | 10 1/8"               | 265mm                |
| Rebate depth            | 3/16"                 | 15mm                 |
| Cutterblock diameter    | 2 3/4"                | 70mm                 |
| Cutterblock speed       | 6000 r.p.m.           | 6000 r.p.m.          |
| Number of cutters       | 2                     | 2                    |
| Thickening depth        | 7"                    | 180mm                |
| Thickening width        | 10 1/2"               | 260mm                |
| Thickening table length | 22"                   | 560mm                |
| Feed speed              | 18.7 ft/min           | 5.7 m/min            |
| Motor power.            | 3 phase               | 1.5 H.P. 1.1 K.W.    |
|                         | 1 phase               | 1.5 H.P. 1.1 K.W.    |
| Machine dimensions.     | Length                | 39 1/2" 1000mm       |
|                         | Width                 | 23 1/2" 600mm        |
|                         | Height                | 39" 990mm            |
| Weight                  | 265 lbs.              | 120 Kg.              |


## Standard equipment:

- Planer Fence tilts to 45°
- Rear Fence Guard.
- Cutterblock Bridge Guard.
- Thickening Guard and Chip Deflector.
- Rebate Safety Holding Device.
- Pair H.S.S. Planer Knives.
- Totally Enclosed Motor.
- Push button switchgear with overload and no-volt protection.
- Instruction Manual.



### Surfacing

Lever action infeed table enables rapid adjustment to be made against scale. Safety type cutterblock with two H.S.S. knives easily adjusted.

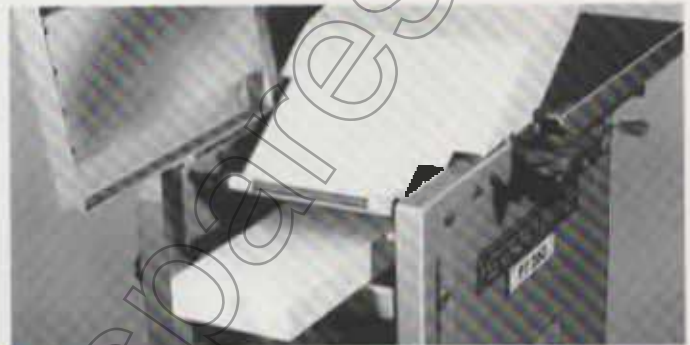

### Thickening

Thickening table supported on large diameter column. Raised and lowered by means of handwheel and lockable against easily read scale, calibrated in Imperial and Metric units.



### Rebating

Large capacity rebates can be performed. Lever action on infeed table allows rapid change to depth required. Safety holding device fitted as standard.



### Bevelling

The large, rigid and easily adjusted fence allows bevels and chamfers up to 45° to be cut.