

STARTRITE

TA300 & TA300PS

**Tilting arbor sawbenches
with large capacity features
using minimum floor space**

Features:

- Scoring saw
- Large capacity sliding table
- Table and fence extension
- Rear support table
- Safety warning light



STARTRITE

Model TA300 & TA300PS




Model TA300 Basic machine.



www.alt\$amsandspares.co.uk

1. Push button control box can be located on front face of machine or on end of sliding table rail as required.
2. Extension for extra support when cutting large panels.
3. Large diameter rail gives rigidity to sliding table and allows smooth movement. Rail can be positioned flush with machine front when extended facility not required.
4. Optional Sliding table includes extending support and extending fence with stops.
5. Safety warning light indicates 'power on'.
6. Handwheels for rise and fall and tilt adjustment.
7. Scoring saw used with matched 250mm diameter sawblade for panel cutting. Fine screw control provided for height adjustment and micro adjustable saw collar on scoring saw spindle allows accurate alignment with main sawblade.
8. Saw tilts to 45° controlled by handwheel. Standard guard and riving knife suitable for use with 250mm blade and scoring saw for panel cutting or with 300mm blade for deep work.
9. Large table insert gives easy access for blade changing.
10. Heavy ground steel table with large working area.
11. Optional rear work support table size 1100 mm x 855mm (43¼ in. x 33½in.).
12. Optional extended table and fence rail gives 1360 mm (53½in.) maximum saw to fence. Without extension maximum distance is 648mm (25½in.).
13. Fence scales are calibrated in metric and imperial units. Adjustable cursor gives position for either location of fence face plate.
14. Extension table faced with melamine.

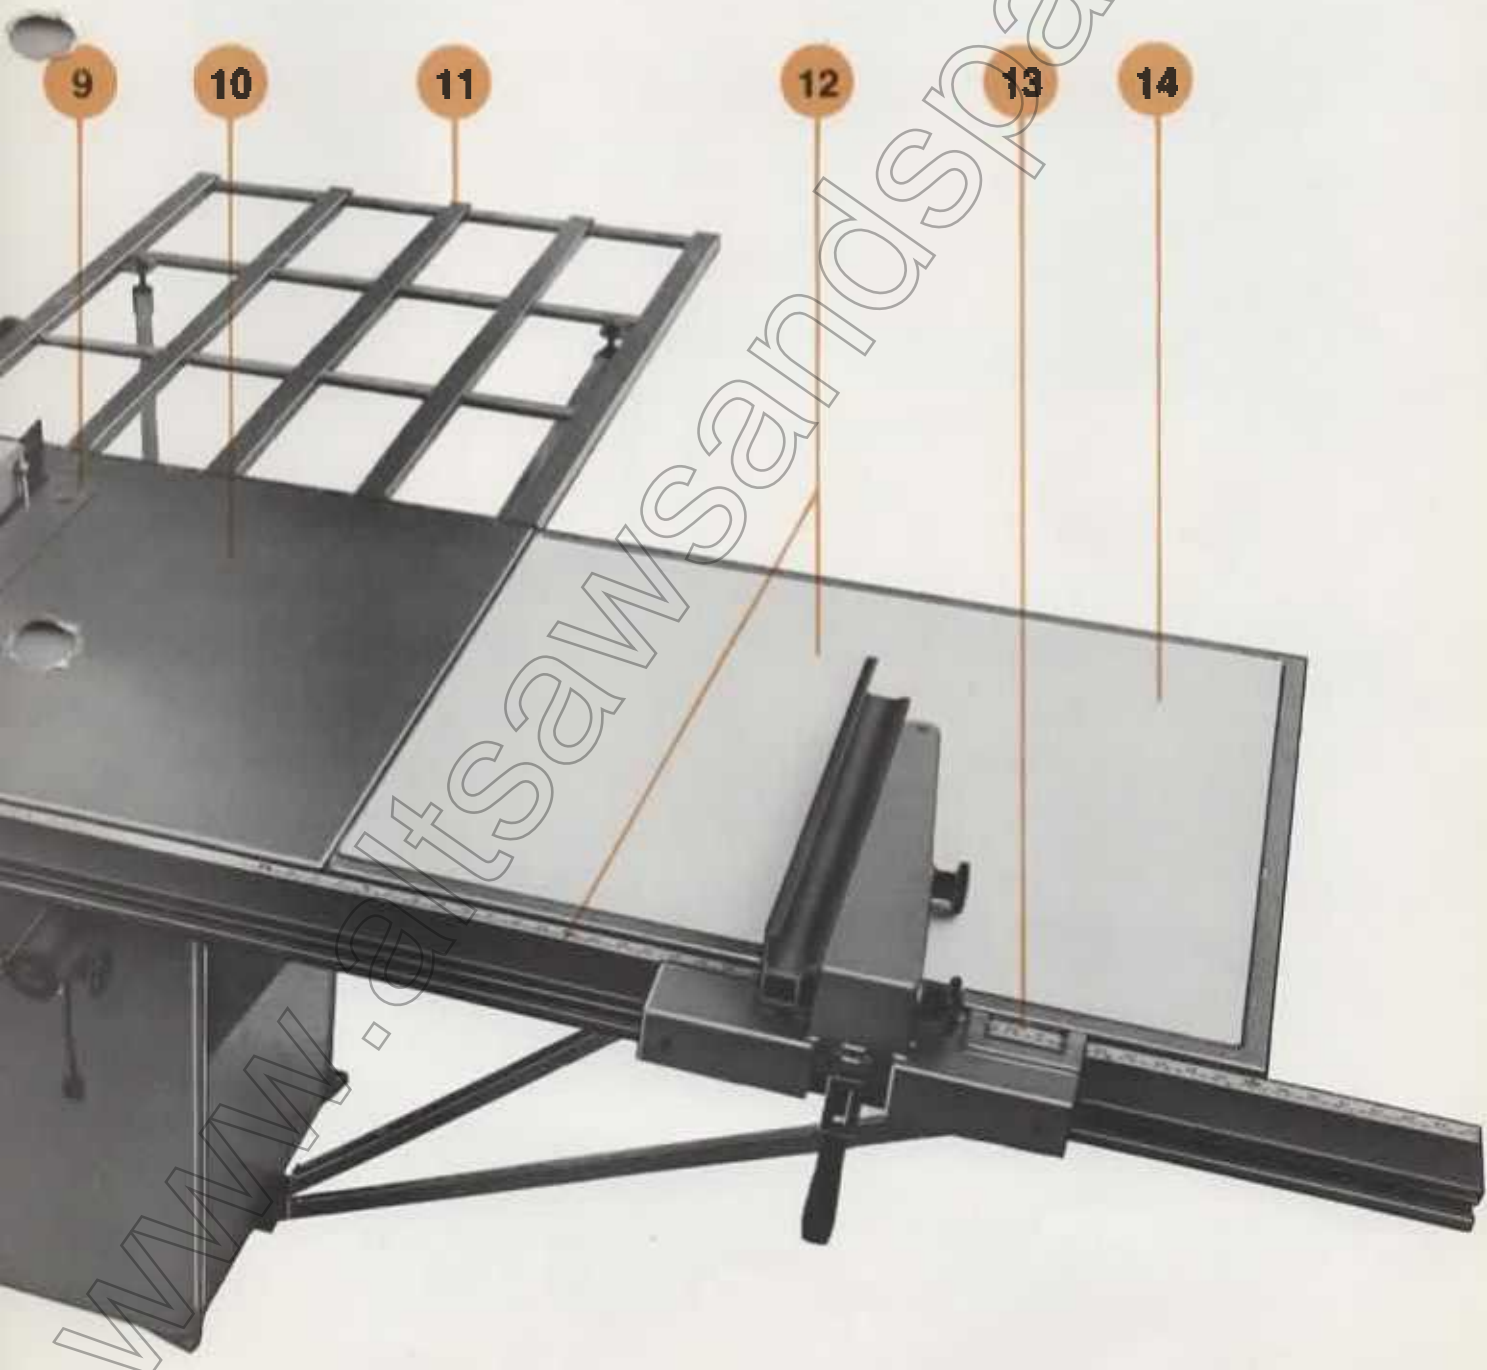




Sliding table folds down against side of machine and rail slides in flush with machine when not required. Gives maximum utilisation of available floor space.



Push button control box can be located on cabinet base or on sliding table rail for maximum operator convenience and safety. Note — machine cannot operate if box is not connected to either station.

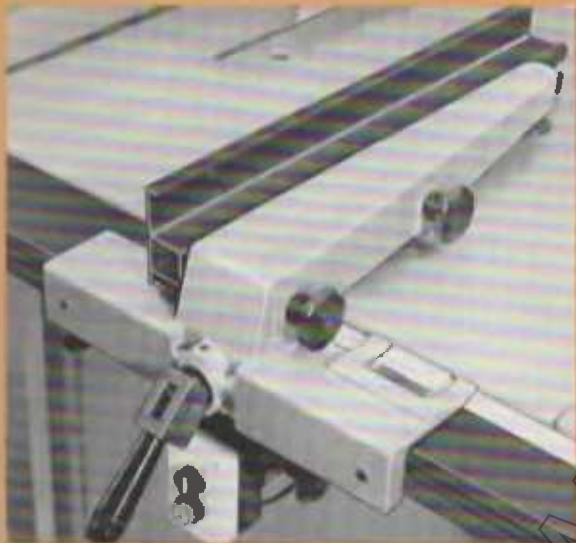

Fence slides easily to required position. Adjustable cursors give accurate location for vertical or horizontal position of face plate. Handle locks fence rigidly in desired position but allows quick release for removal.



Table insert removed showing height adjustment screw for scoring saw and micro-adjustable saw collar for accurate alignment. Height adjustment screw is accessible with table insert in position using tool provided.



Fence plate shown with low profile face in position.

Standard equipment

TA300 carbide tipped sawblade with 36 teeth for ripping, 300mm dia.

TA300PS carbide tipped sawblade with 80 teeth for panel cutting, 250mm dia.

TA300PS carbide tipped scoring sawblade with 16 teeth, 105mm dia.

Riving knife - thickness, 2.5mm

Sawguard

Rip (parallel) fence with adjustable face plate

Mitre gauge with adjustable stop

Start/stop buttons with 24 volt control circuit, overload and no-volt protection

Safety warning light for 'power-on'

Electrical interlock on access door

Accessories

Sliding table extension support.

Safety hold-down unit for moulding and grooving*

Table insert for use with moulding block or wobble saw


Wobble saw*

Moulding block*

Selection of moulding cutters

Dust extraction equipment

*Note: Safety hold-down unit MUST ALWAYS be used when moulding or grooving.

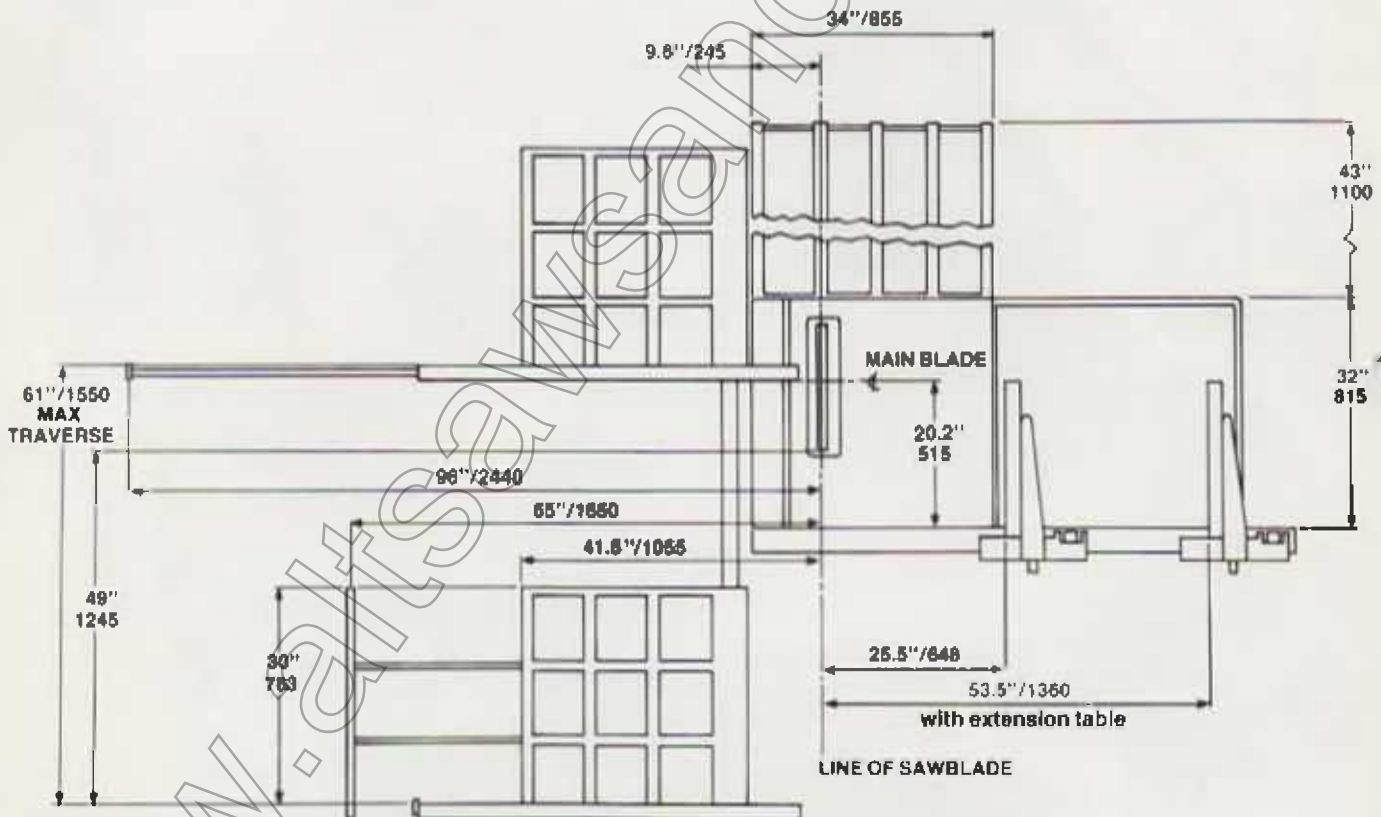

STARTRITE®
MACHINE TOOL CO. LTD.



Waterside Works, Waterside Lane, Gillingham, Kent ME7 2SF Telephone: (0634) 55122 & 851166 Telex: 965730

PG/BL/11/86